



COMBILIFT

Long Load Material Handling Solution

C6000 > C10,000

making short work of long loads



forward/reverse mode



carousel mode



sideward mode



three machines in one


> counterbalance forklift > sideloader > aisle truck

www.combiliftdepottx.com



SPECIFICATIONS


Model C6000, C8000, C9000, C10,000

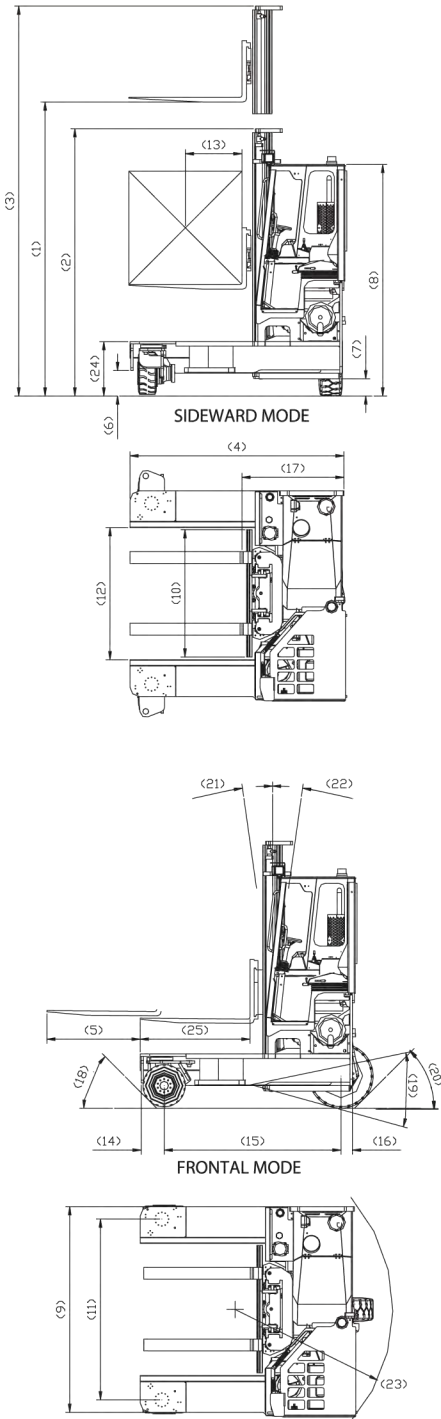

REF	DESCRIPTION	C6000	C8000	C9000	C10,000
1a	Max. Lift Height		159"		159"
1b	Free Lift Height		0"		0"
2	Height Mast Closed		113"		113"
3	Max. (Mast raised)		192"		192"
4	Overall Length	80"	94"	102"	102"
5	Mast Travel	35"	49"	55"	55"
6	Ground Clearance Under Mast		6"		6"
7	Ground Clearance to Center of Wheelbase		8"		8"
8	Height Over Cab or of Overhead Guard		95"		95"
9	Width		86"		86"
10	Outside Spread of Fork Arms		53"		53"
11	Track Front		78"		78"
12	Frame Opening		55"		55"
13	Load Center Distance	18"	24"		24"
14	Overhang Front	9"			9"
15	Wheel Base	70"	74"		75"
16	Overhang Back		9"		9"
17	Length From Face of Fork		47"		49"
18	Approach Angle		45°		45°
19	Ramp Angle		29°		29°
20	Departure Angle		45°		45°
21	Forward Tilt		3°		3°
22	Backward Tilt		5°		5°
23	Minimum Outside Radius	80"	94"		102"
24	Platform Height		21"		21"
25	Platform Length	33"	47"		53"
A	Capacity	6000lbs	8000lbs	9000lbs	10,000lbs
B	Unladen Weight	11200lbs	12780lbs	12900lbs	13,400lbs
C	Maximum Ground Speed		9 mph		9 mph
D	Gradability		15%		15%
E	V2003 T Kubota Diesel / 3 ltr. GM LPG	60 HP / 65 HP		60 HP / 65 HP	
F	Electric's		12 Volt		12 Volt
G	Fork Section (2" x 5" x)	33"	47"	53"	53"
H	200/50 x 10 Front Tire (Super Elastic)		OD18" / Width 8"		OD18" / Width 8"
I	27 x 10-12 Rear Tire (Super Elastic)		OD 27" / Width 10"		OD 27" / Width 10"
J	Standard Color		Green & Grey		Green & Grey
K	Suspension Seat		KAB Model 116		KAB Model 116

- FEATURES INCLUDE:**
- Rubber Mounted Half Cabin with Top, Front, Side, & Rear Glass
 - Multi - Direction Operation
 - 3 Wheel Hydrostatic Drive
 - Single 4 way lever to Change Direction & Select Drive
 - Load Sensing Steering
 - USA components, SAE hoses & fittings
 - Simple & reliable control system without complicated electronics
 - Deep Suspension Seat standard

Distributed by

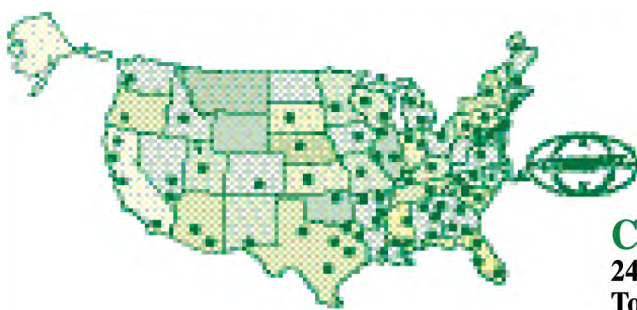

Combilift Depot
 24501 Hufsmith Kohrville Rd #700
 Tomball, TX 77375

Phone: (281) 516-3399
 Toll Free: (866) 609-3605

www.combiliftdepottx.com

COMBILIFT has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and / or dimensions may vary from those illustrated in some countries.