



COMBiLiFT

Customized Handling Solutions

C6000 ST

multi-directional forklift



three machines in one

> counterbalance forklift > sideloader > aisle truck

www.combiliftdepottx.com



SPECIFICATIONS


C6000 ST

DESCRIPTION	STANDARD
1a Max. Lift Height	159"
1b Free Lift Height	0"
2 Height Mast Closed	111 1/2"
3 Max. (Mast raised)	204 1/4"
4 Overall Length	59" / 76 3/4"
5 Mast Travel	31 1/2" / 49 1/4"
6 Ground Clearance Under Mast	9"
7 Ground Clearance to Center of Wheelbase	5"
8 Height Over Cab (without work lights)	104 3/4"
9 Platform Width	120"
10 Outside Spread of Fork Arms	57"
11 Track Front	97 1/4"
12 Frame Opening	59"
13 Load Center Distance	12" / 24"
14 Overhang Front	8"
15 Wheelbase	45 3/4" / 63 1/2"
16 Overhang Back	5 1/4"
17 Length From Face of Fork	29 1/2"
18 Approach Angle	45 °
19 Ramp Angle	17°
20 Departure Angle	45°
21 Forward Tilt	4°
22 Backward Tilt	4°
23 Minimum Outside Radius	83" / 95"
24 Platform Height	19 1/2"
25 Platform Length	29 1/2" / 47 1/4"
26 Overall Width	120" / 128"
A Capacity	6,000lbs
B Unladen Weight	12,500lbs / 13,200lbs
C Maximum Ground Speed	6 mph
D Gradability	10%
E Kubota V1505- T Diesel	43hp
F LPG	65hp
G Electric	72 Volt 620 AH
H Fork Section	2" x 5" x 29 1/2" / 47 1/4"
I 16 x 7 – 10.5 Front Tire (Solid)	OD 16" / Width 7"
J 23 x 10 – 12 Rear Tire (Super Elastic)	OD 22 3/4" / Width 9 1/2"
K Standard Color	Green & Grey

FEATURES INCLUDE:

- Rubber Mounted Cabin
- Multi-Direction Operation
- Load Sensing Steering
- 2 Wheel Hydrostatic Drive
- 4-way Lever Positioning of Wheels
- Stand up Operator

Distributed by

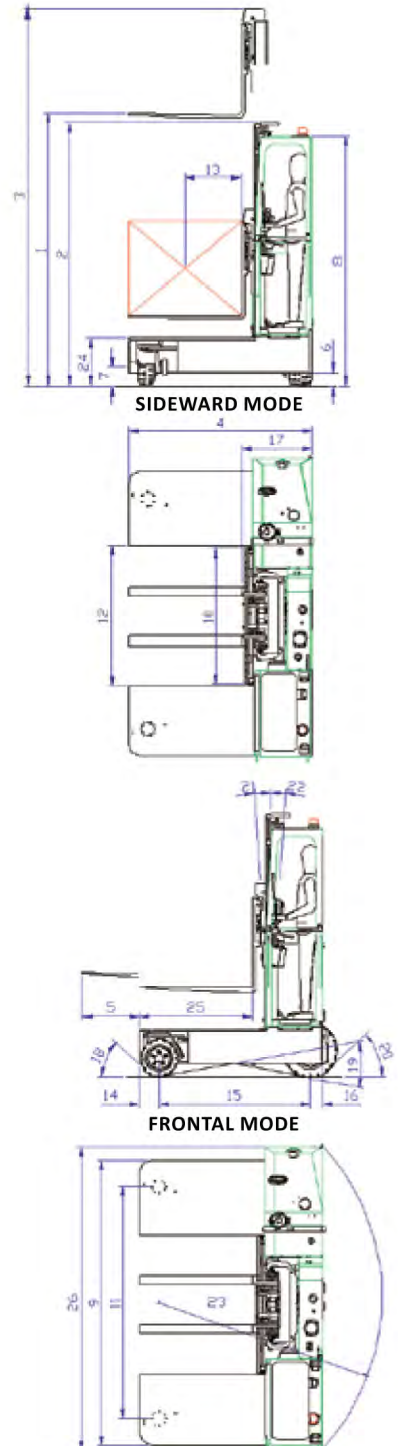

CombiLift Depot

24501 Hufsmith Kohrville Rd #700
Tomball, TX 77375

Phone: (281) 516-3399
Toll Free: (866) 609-3605

www.combiliftdepottx.com